






VERSA 750


FULL VERSATILITY IN ONE PRODUCT

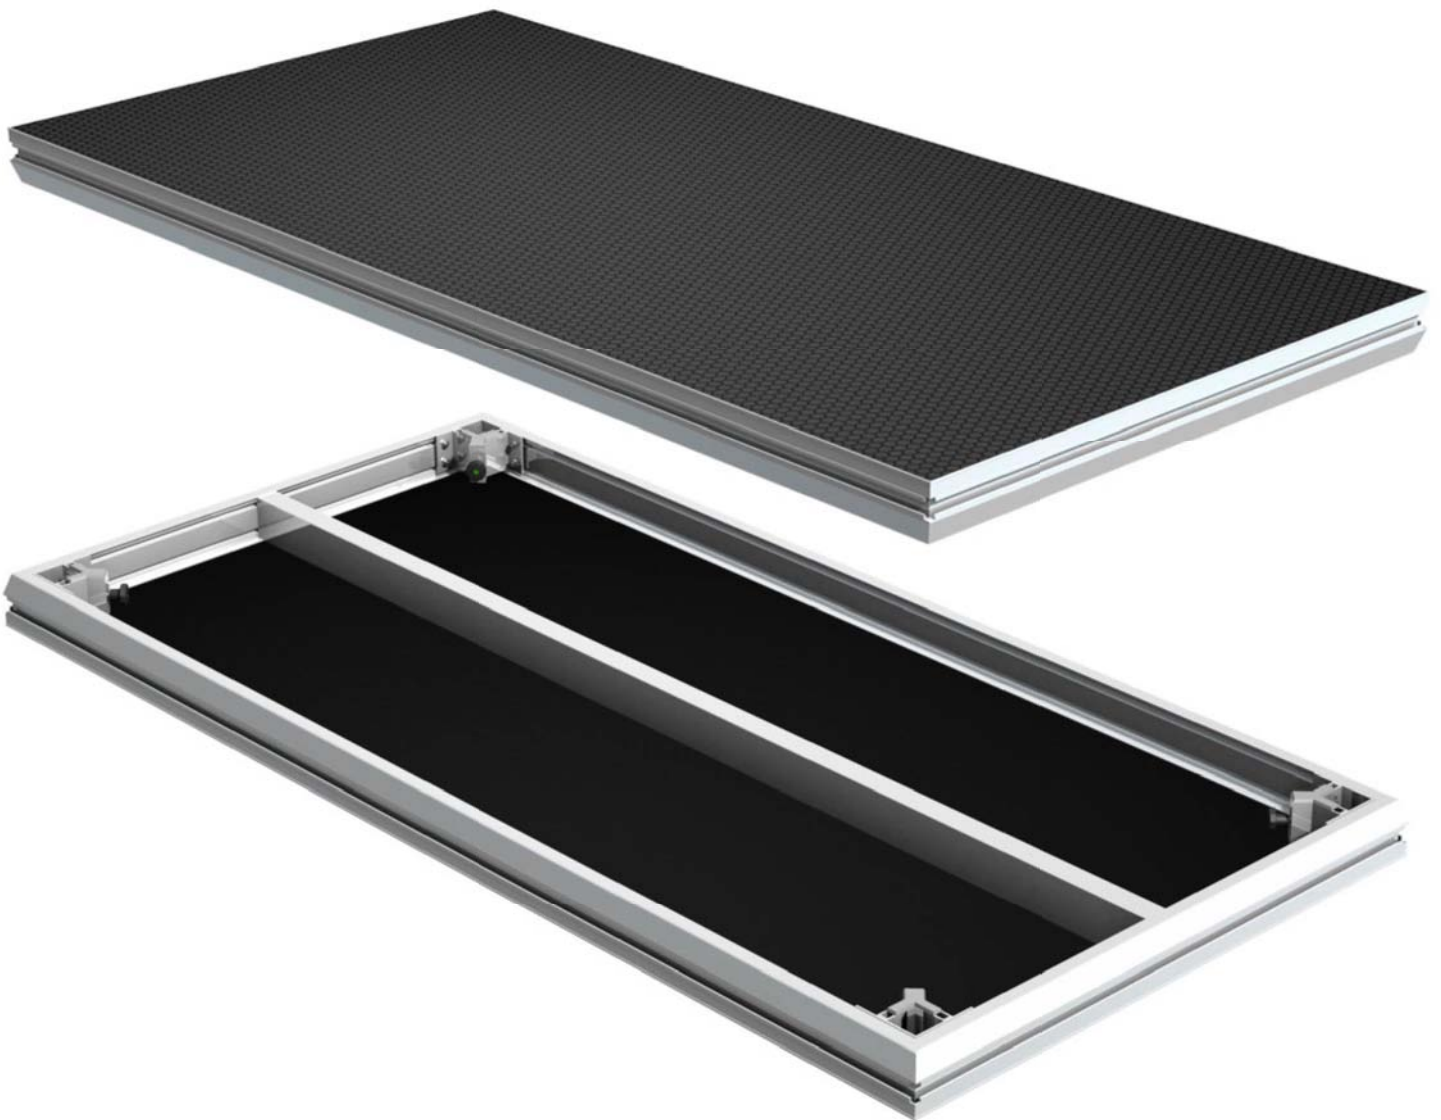

Everdeck is proud to launch the new VERSA750. Model VERSA750 combines strenght, durability, stability, ligh-



STRENGTH – 750KG/M²

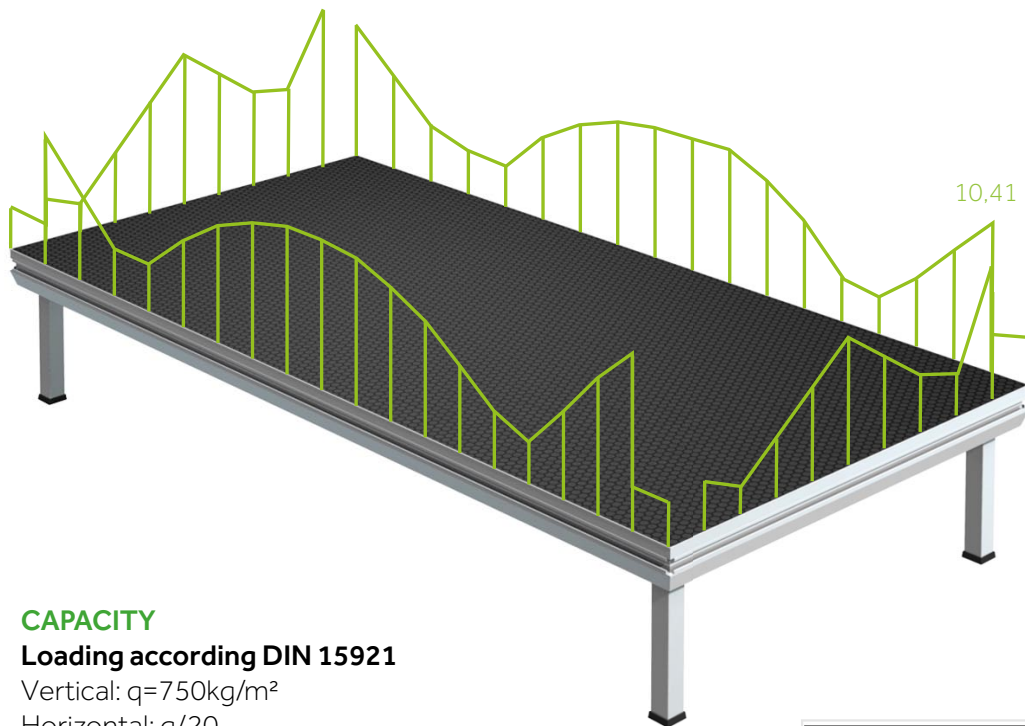

CAPACITY

Loading according DIN 15921


Vertical: $q=750\text{kg/m}^2$

Horizontal: $q/20$

Ingenieure für Ihre Visionen ■ Zuverlässig ■ Sicher ■ Schnell		EXPO Engineering	
Statische Berechnung Static Analysis		Datum: 04.03.2016 Lastenheft-Nr.: 2016030404 Kunden-Nr.: 80902 Sachbearbeiter/in: Uwe Rutenmund	
Auftraggeber: Customer:		Everdeck SC Ul. Kluczborska 13B 46 243 BOKACICA POLEN	
Projekt: Project:		2016-0144 Stage platform 2x1 m	
<small>Nur gültig und rechtsverbindlich als Original mit Stempel und Unterschrift - Kopien sind nichtbindend! Only valid and binding as an original document with stamp and signature - copies are illegal</small>			
		Expo Engineering GmbH Suerkamp 14 D-59102, Cappel Fon: +49 (0) 2520-93162-0 Fax: +49 (0) 2520-93162-220 www.expo-engineering.de	



STABILITY – MINIMUM DEFLECTION

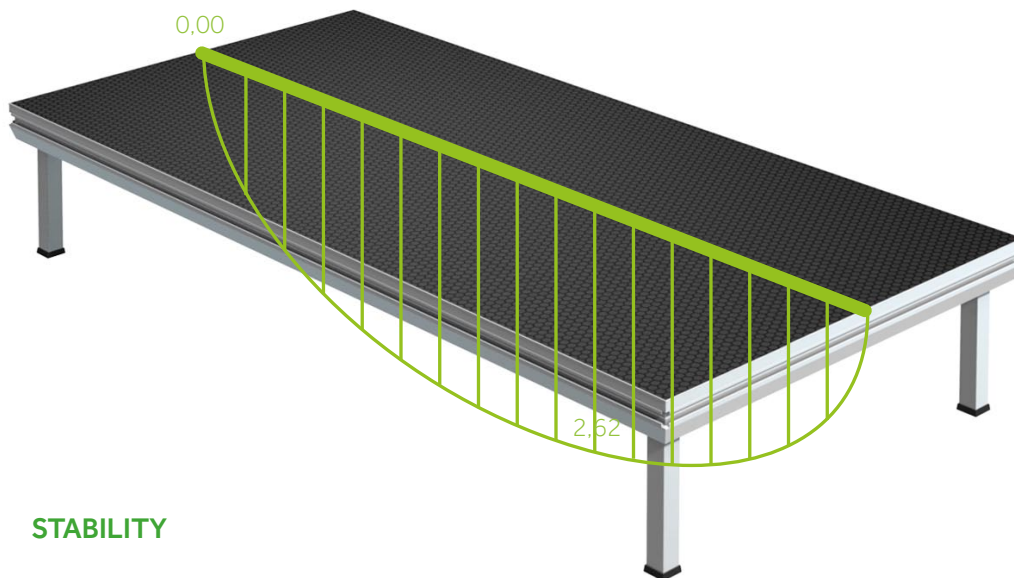

Ingenieure für Ihre Visionen ■ Zuverlässig ■ Modern ■ Schnell		EXPO Engineering	
Statische Berechnung Static Analysis		Datum: 04.03.2016 Lastenheft-Nr.: 2016030404 Kunden-Nr.: 80902 Sachbearbeiter-Nr.: Uwe Rutenmund	
Auftraggeber: Customer:		Everdeck SC Ul. Kluczborska 13B 46 243 BOKACICA POLEN	
Projekt: Project:		2016-0144 Stage platform 2x1 m	
<small>Nur gültig und rechtsverbindlich als Original mit Stempel und Unterschrift - Kopien sind nicht verbindlich Only valid and binding as an original document with stamp and signature - copies are illegal</small>			
		Expo Engineering GmbH Suerkamp 14 D-59102, Oelde Fon: +49 (0) 2520-93162-0 Fax: +49 (0) 2520-93162-220 www.expo-engineering.de	



LIGHTWEIGHT




LIGHTWEIGHT

Only 32kg
for 2x1m deck



FLEXIBILITY

COMPATIBLE PROFILE

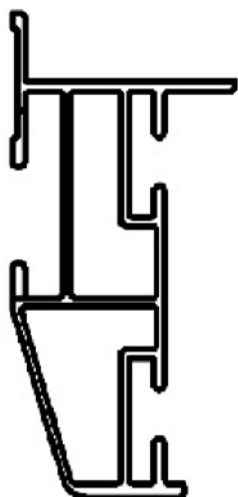

Compatibility - with other leading brands.

Shape improvement - angle on the outside compatible with Layher and Nivtec beam without using any special adaptors.

Low storage costs - only 9cm stacking height



FLEXIBILITY

UNIVERSAL LEG CORNER

PROBLEM

Main systems on the market provide legs 48,3 round, 50x50 square,


pressure cube inside the corner.

In addition the pressure cube is really tiny that's why all force is going only to the longer screw and this is not providing great stability.


SOLUTION

Our new pressure cube is universal for above legs 50x50sq, 60x60 sq, and 48,3 round.


extended our corner. No matter what type of the leg we will use the stability.





**Standard
pressure cube**



**Everdeck
pressure cube**




48,3






AVAILABLE FINISHES

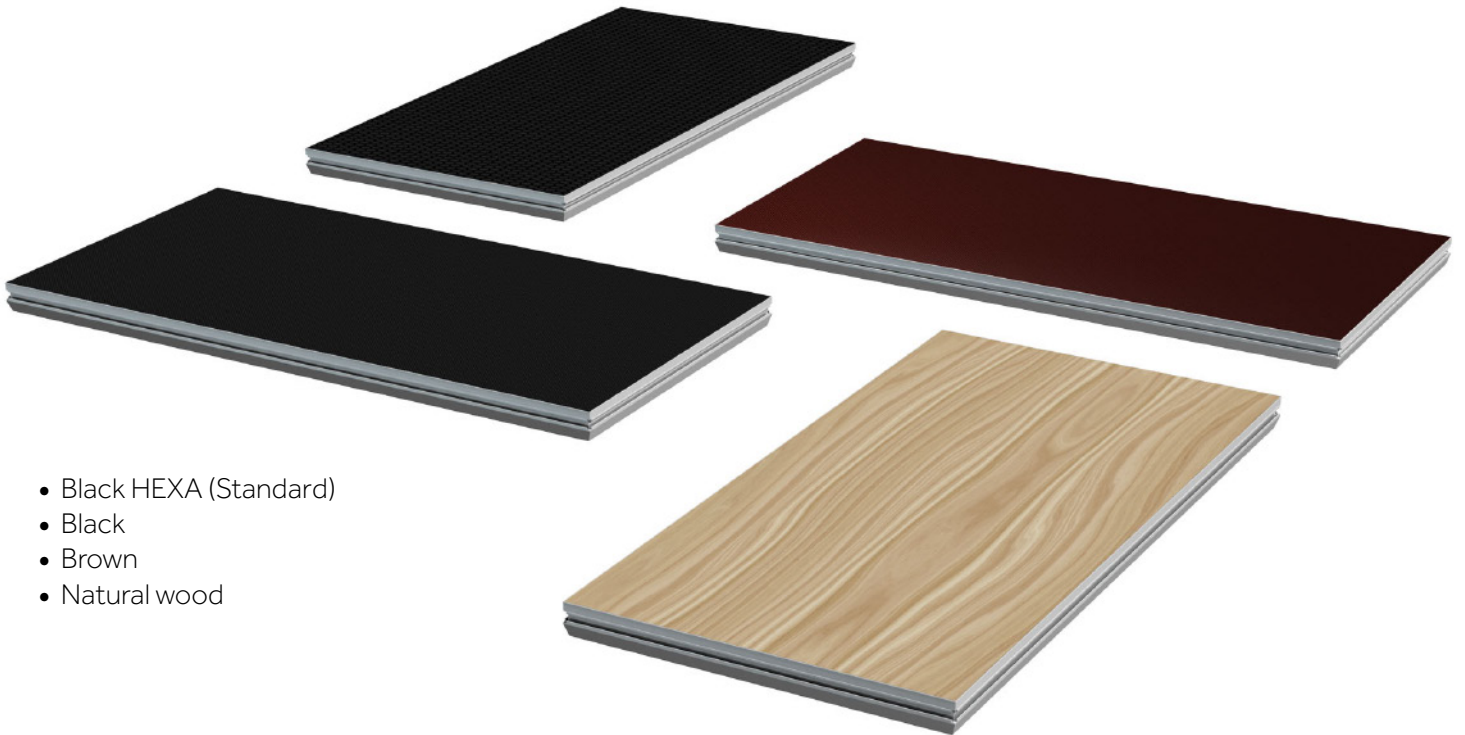


- Black HEXA (Standard)
- Black
- Brown
- Natural wood




- transparent
- black plexi
- white plexi

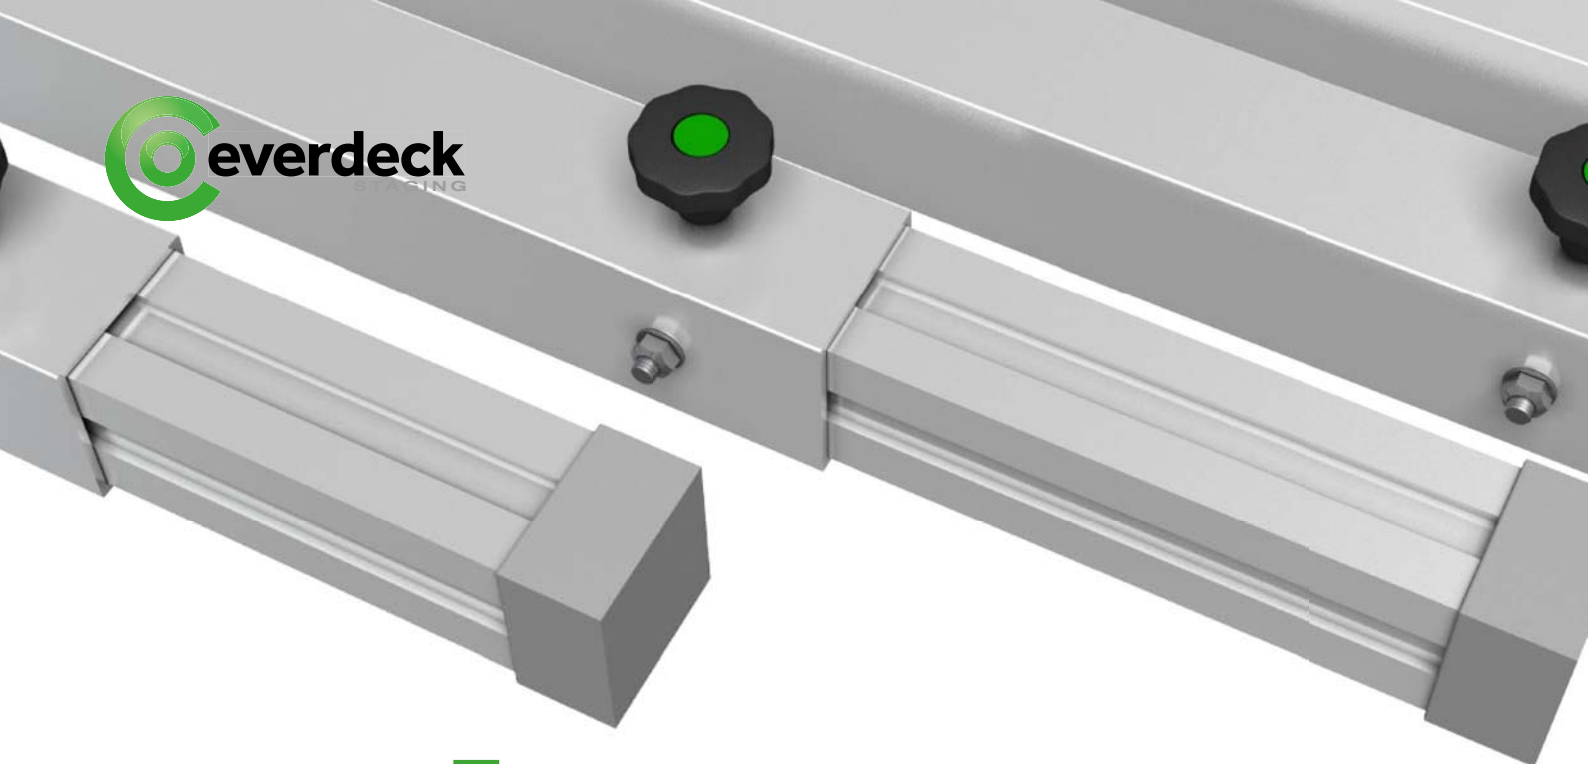


TELESCOPIC LEGS

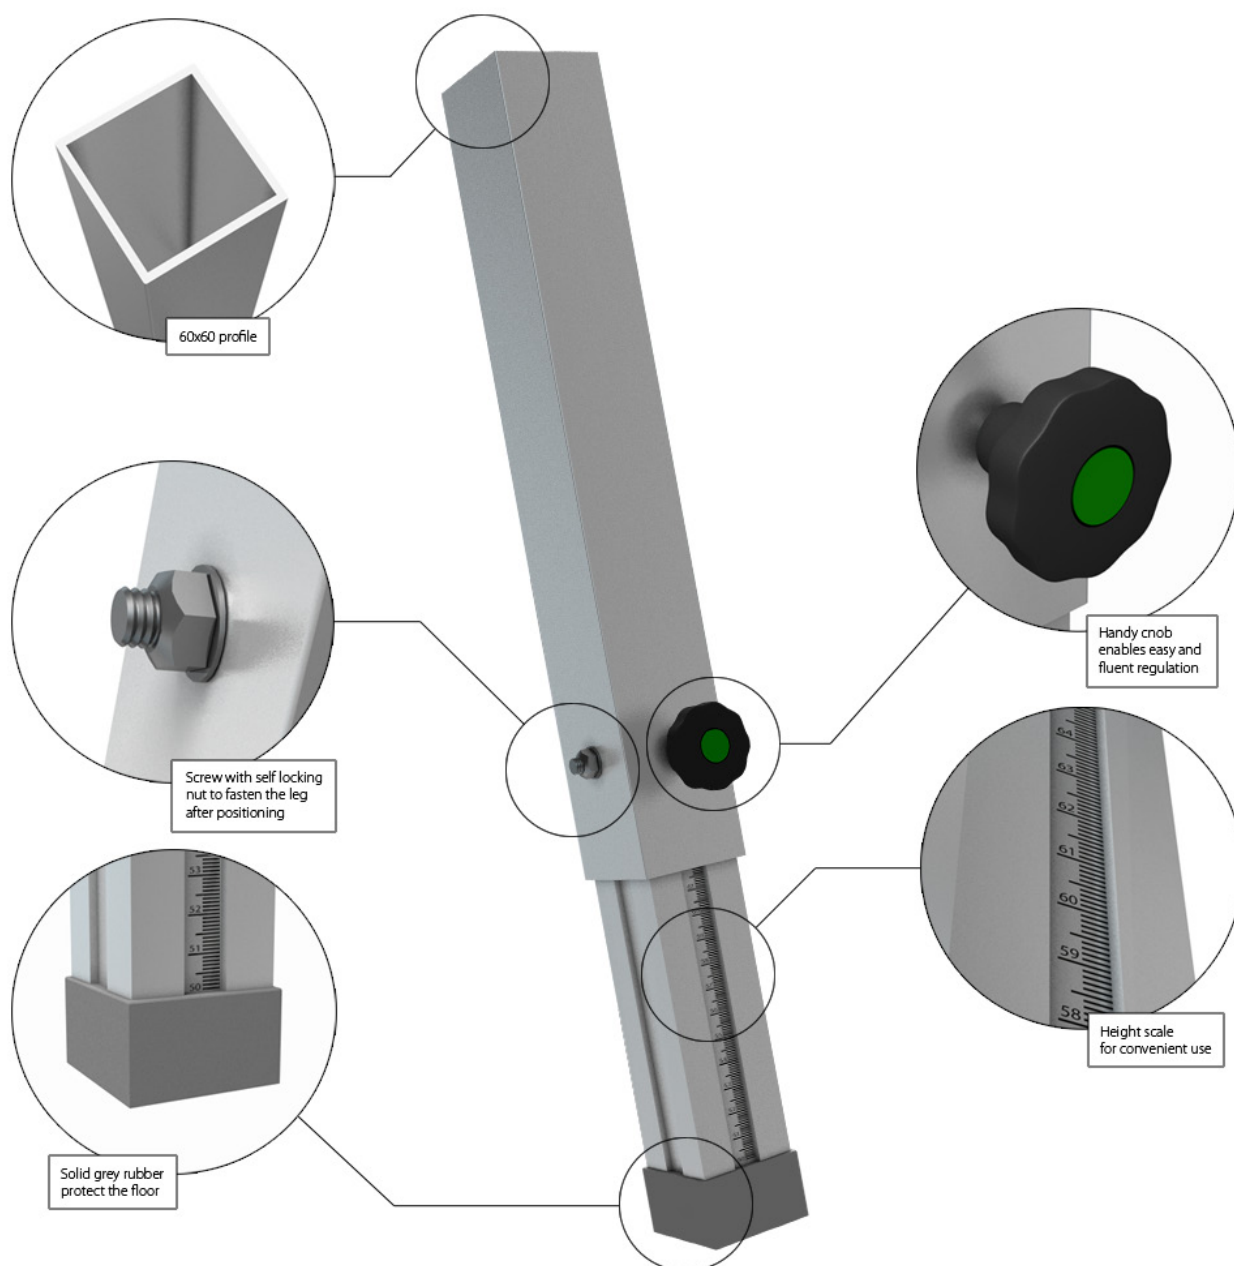

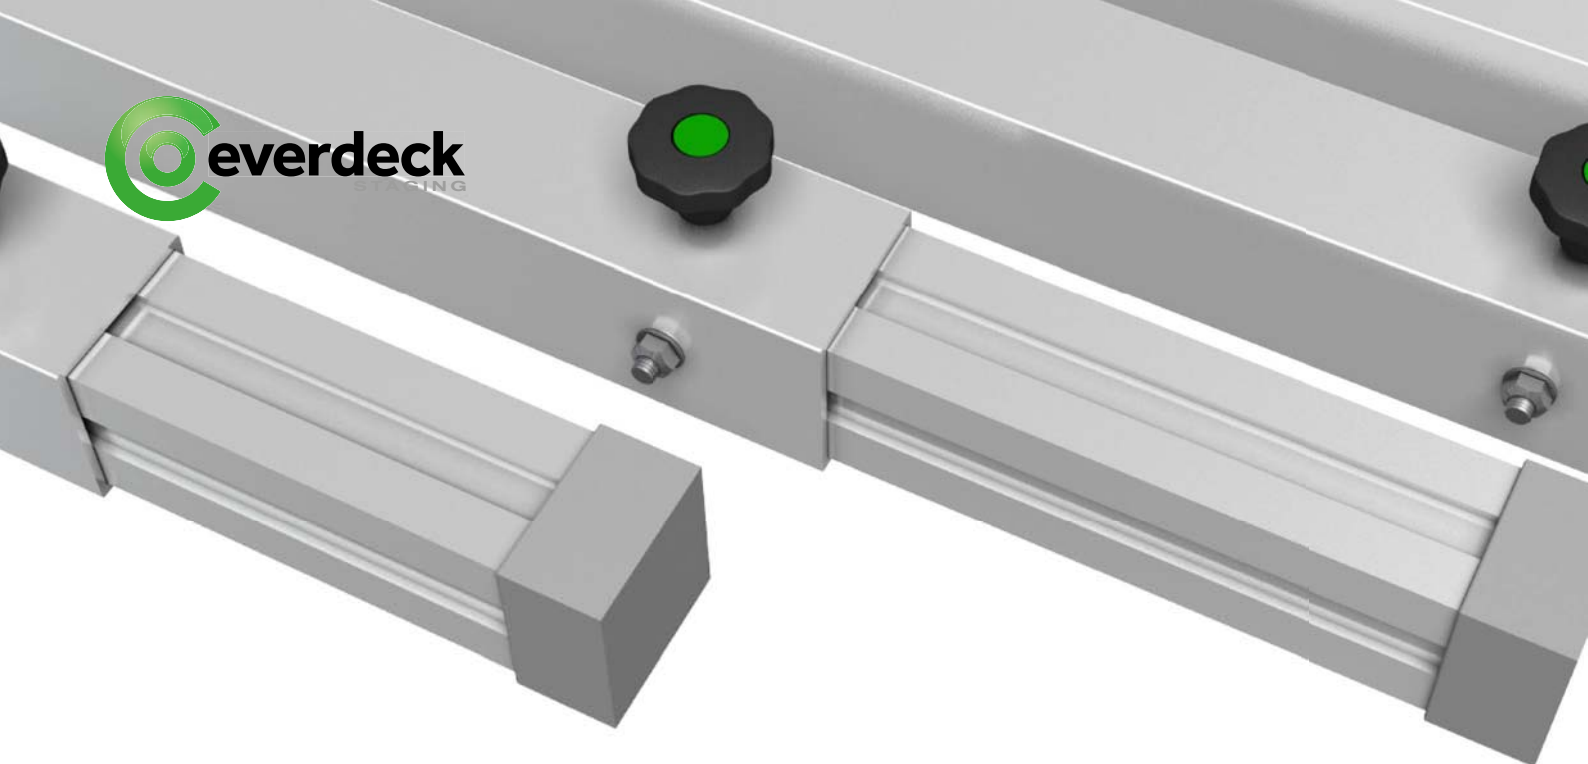


PRODUCT CODE	HEIGHT in cm (H)	SUITABLE FOR
VTL40	40-60	VERSA750
VTL60	60-100	
VTL80	80-140	
VTL100	100-180	

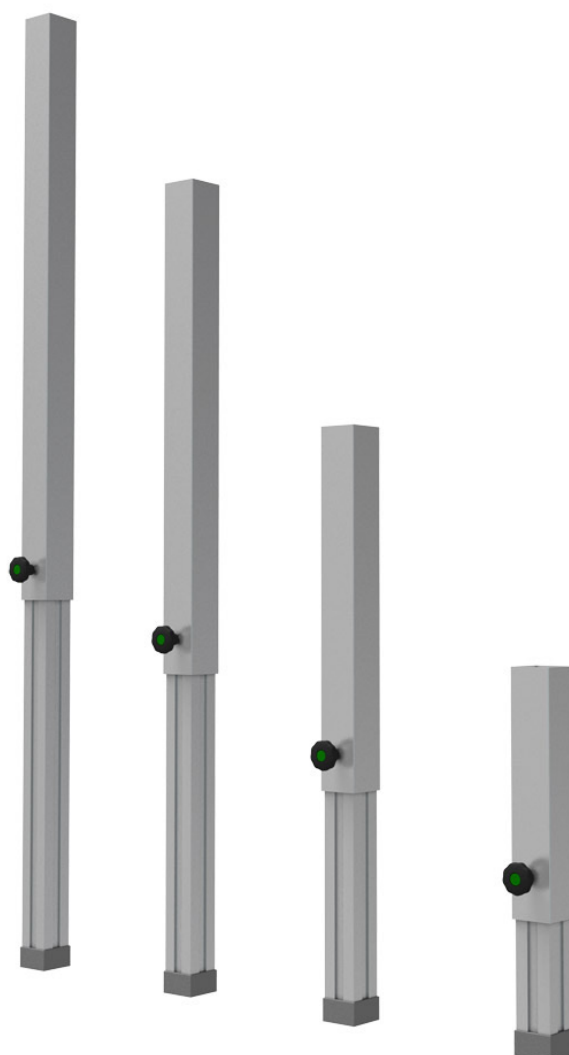





SET LEGS

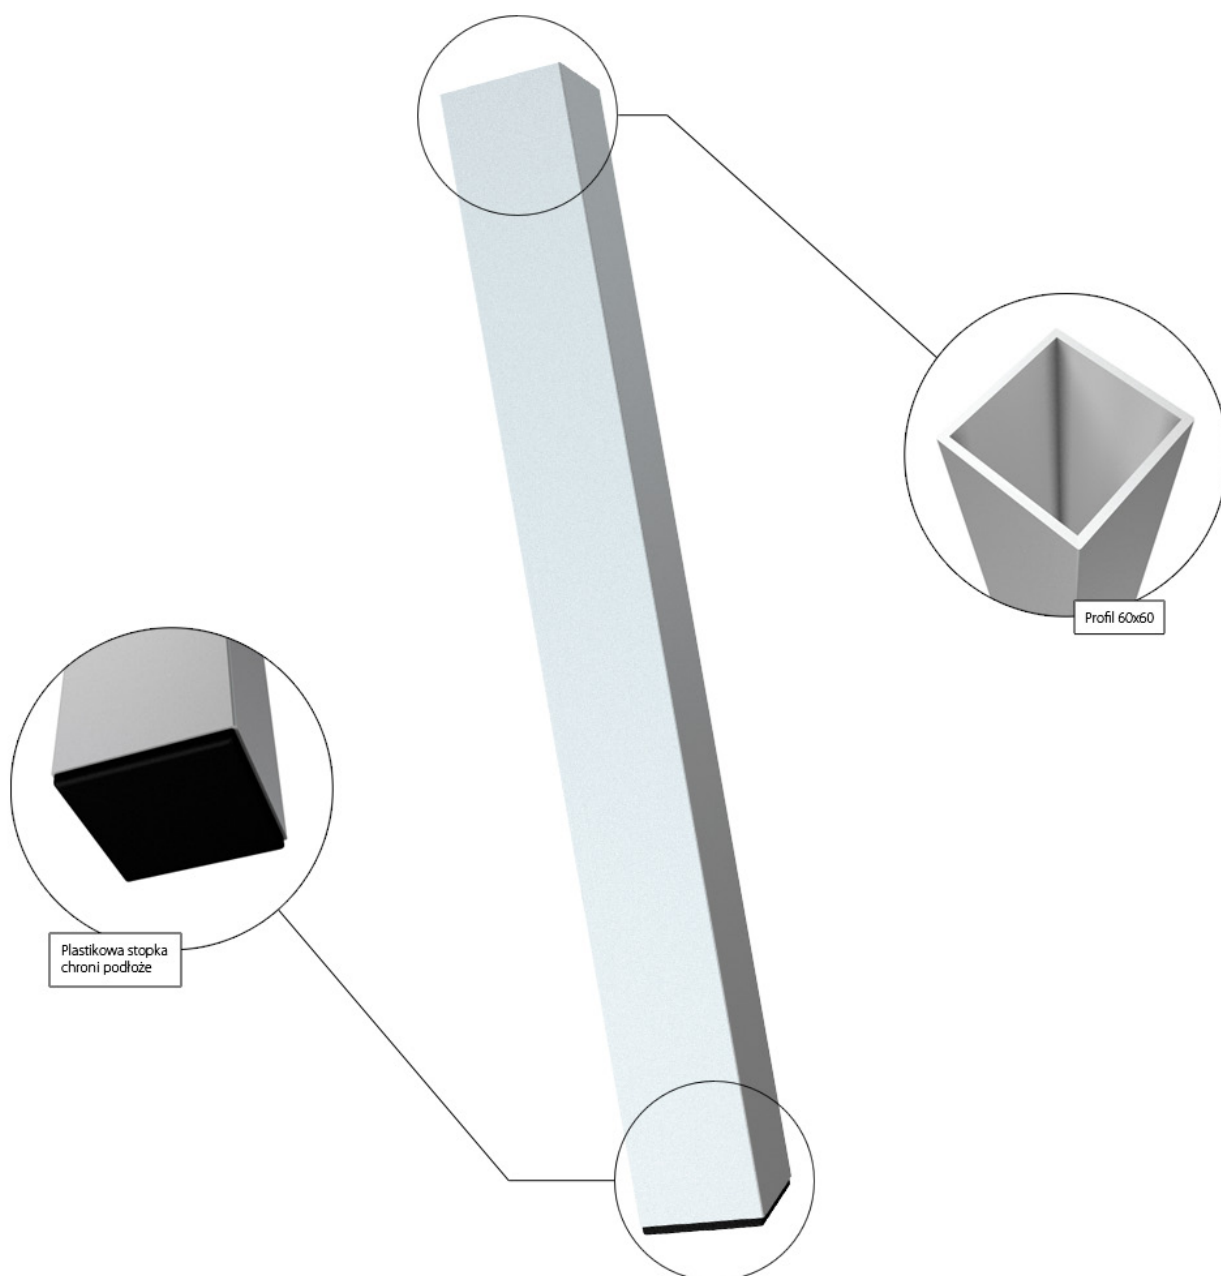



PRODUCT CODE	HEIGHT in cm (H)	SUITABLE FOR
VFL20	20	VERSA750
VFL40	40	
VFL60	60	
VFL80	80	
VFL100	100	
VFL120	120	

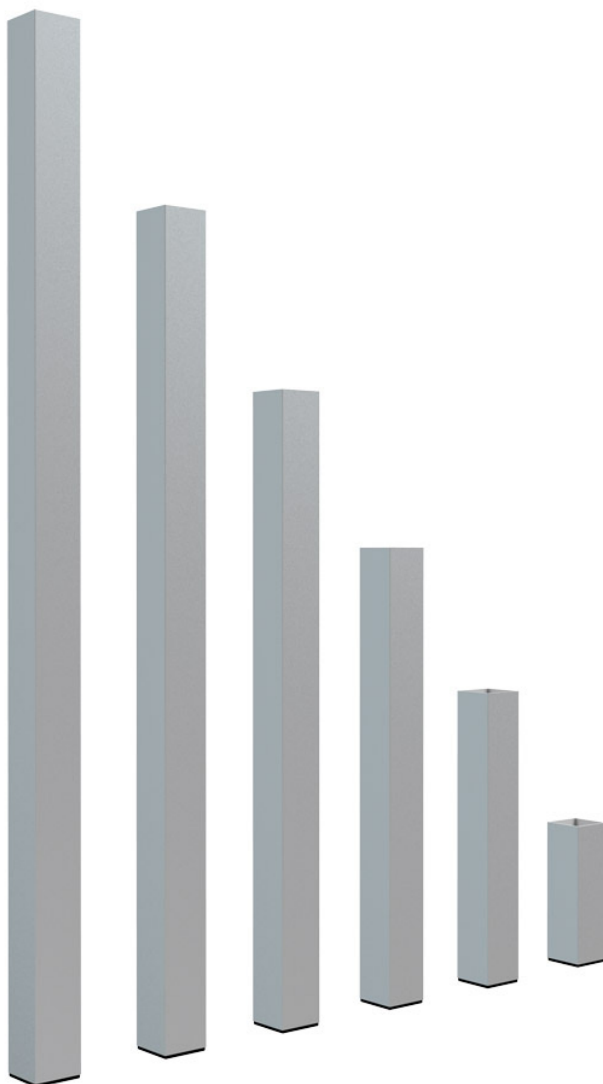


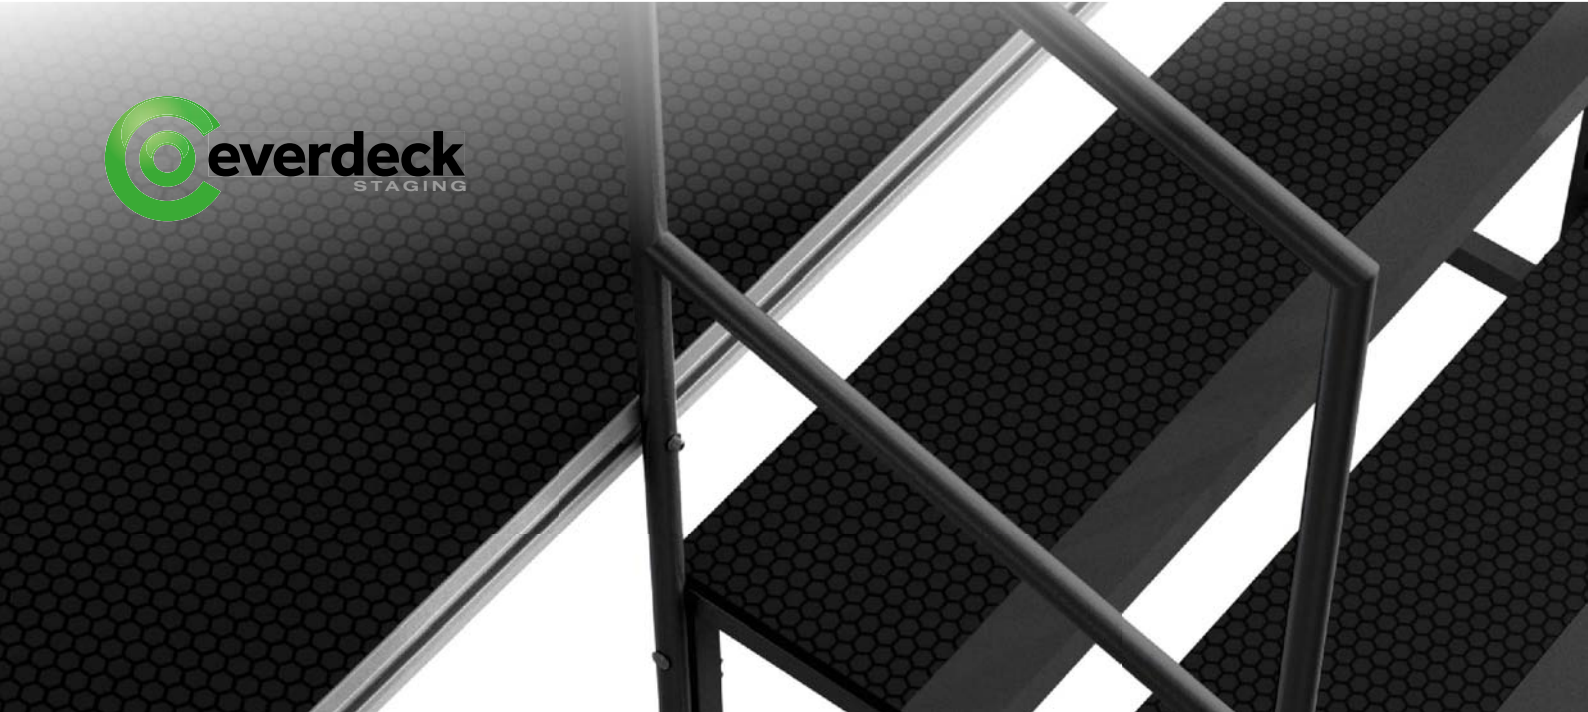

MODULAR STAIR STEPS




used separately or together for
several stage heights

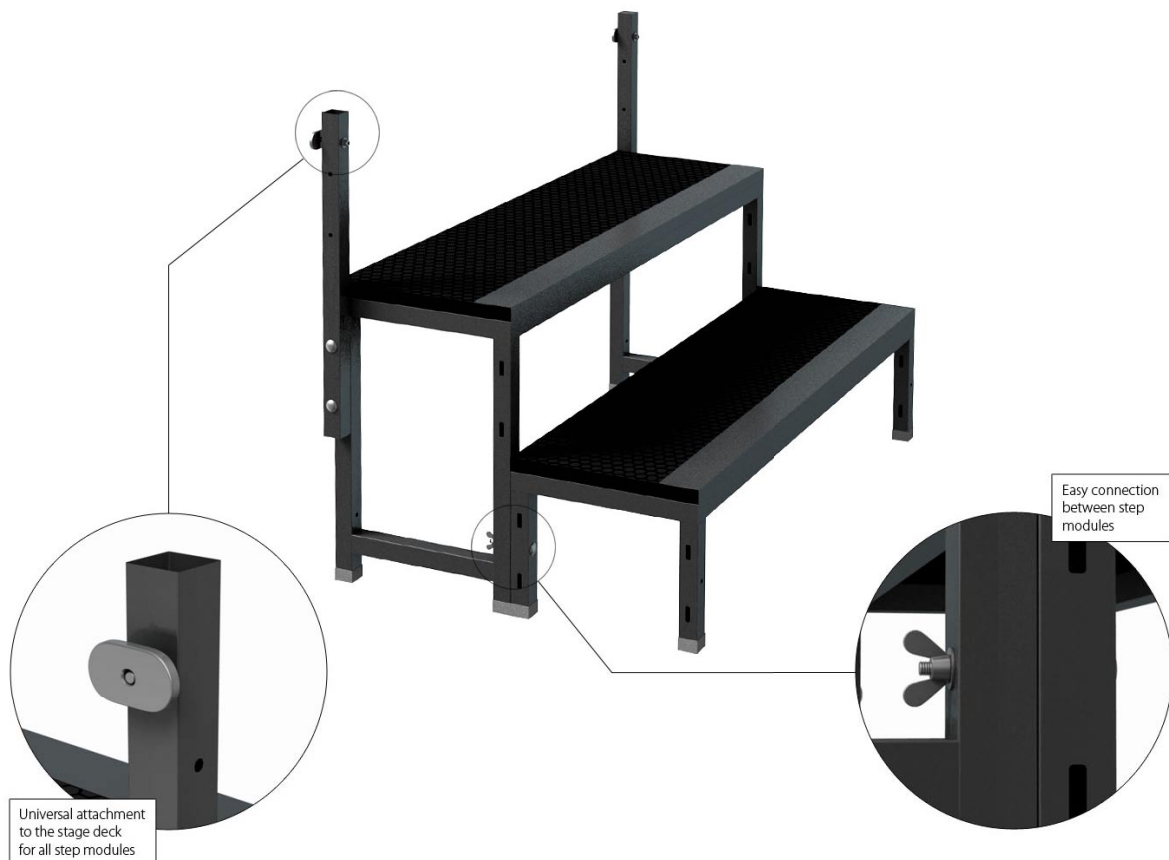



Handrail for modular stairs, assembled on two adjacent steps

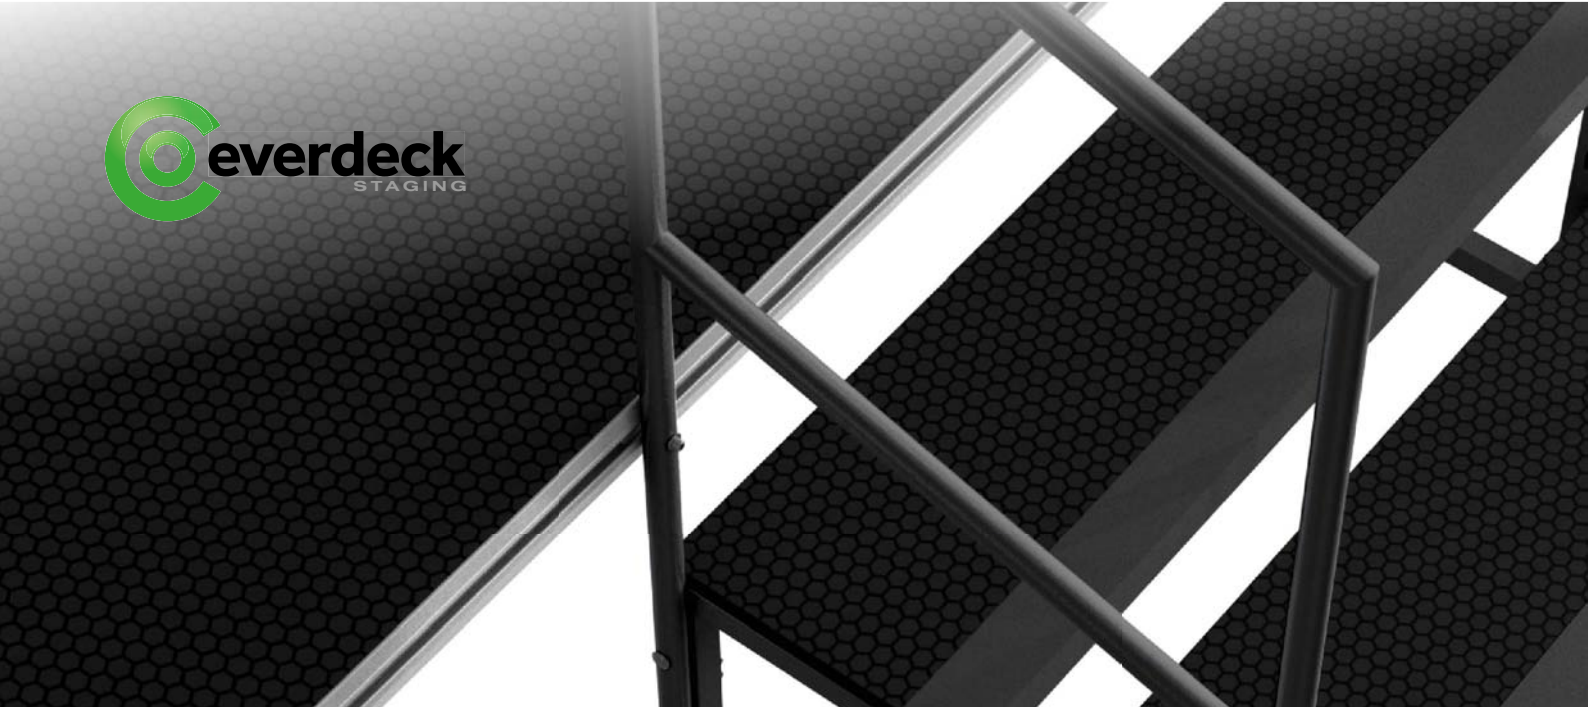

VSM20
Modular stair step 20cm



VSM40
Modular stair step 40cm



VSM60
Modular stair step 60cm



VSM80
Modular stair step 80cm




Modular stairs handrail


ADJUSTABLE STAIRS




Adjustable steps
for fluent height
regulation

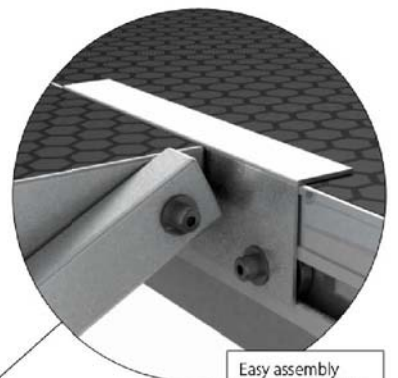


Easy assembly
to VERSA 750 deck

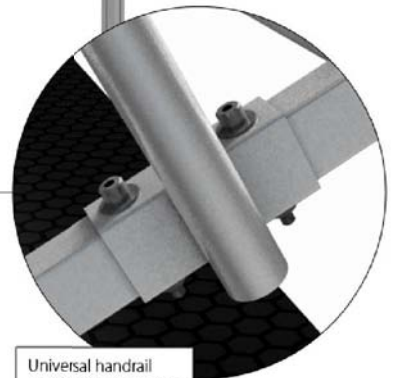


Universal handrail
suitable for adjustable
stairs with 4, 5
and 7 steps




VAS-2
2 step adjustable stair
40-60cm



VAS-4
4 step adjustable stair
60-100cm



VAS-5
5 step adjustable stair
80-140cm

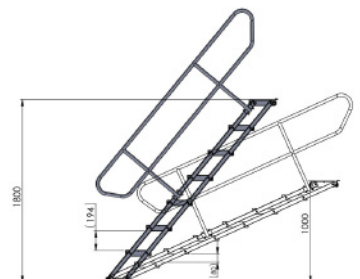

VAS-7
7step adjustable stair
100-180cm




VASH-L
Adjustable stair handrail left




VASH-R
Adjustable stair handrail right

Adjustable stair handrails are universal for 4, 5 and 7 step handrails.

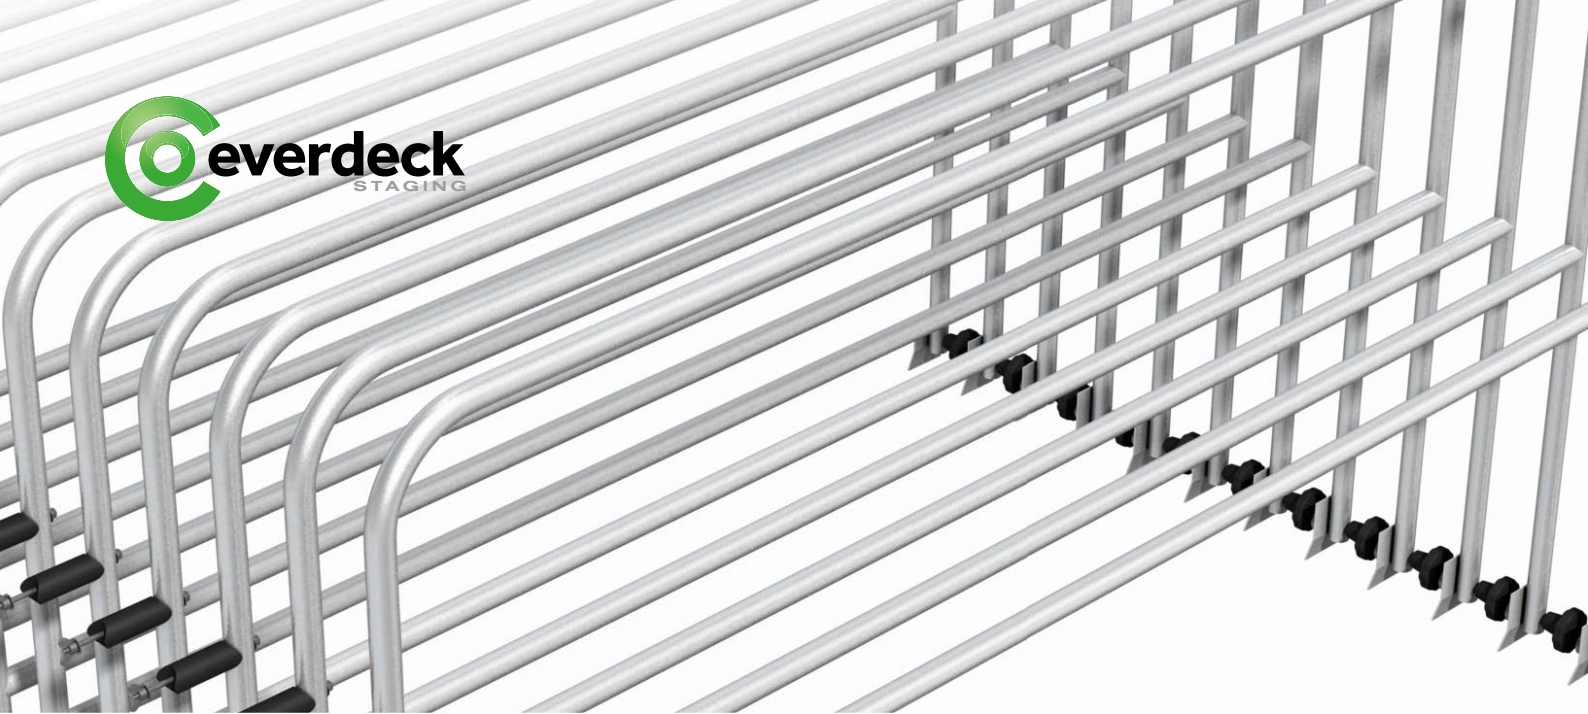

STAGE HANDRAILS

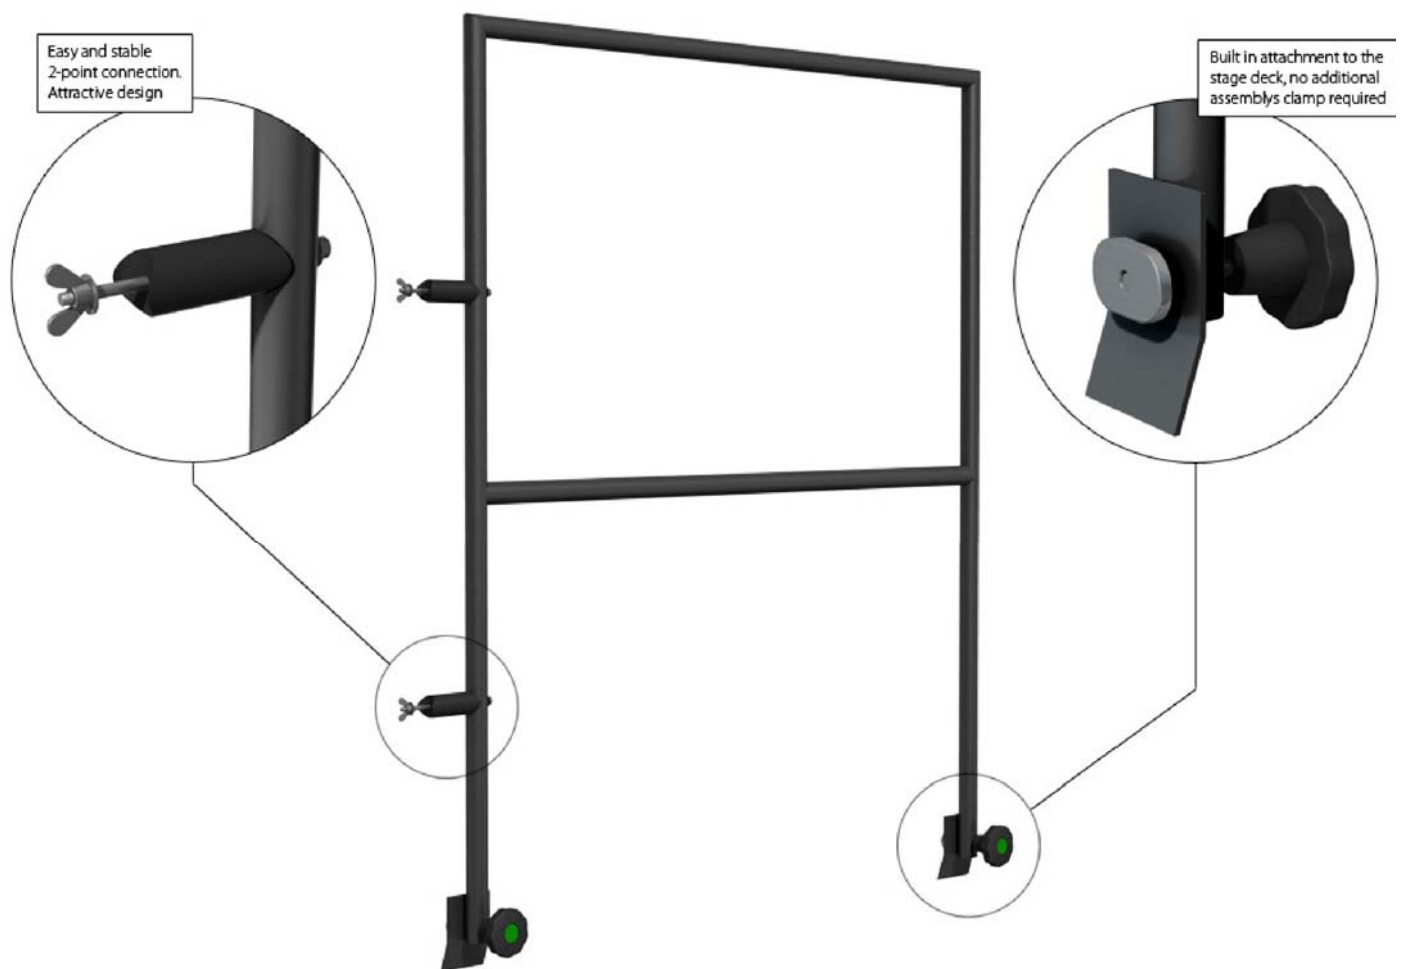

2m and 1m steel handrails for stage decks, galvanized or with black powder coating.
For standard use with no public access (30kg/m).
Other lengths on request.



Standard handrails



VH0.5
Stage handrail 0,5m




VH1
Stage handrail 1,0m





VH2
Stage handrail 2,0m

CLAMPS AND ACCESSORIES

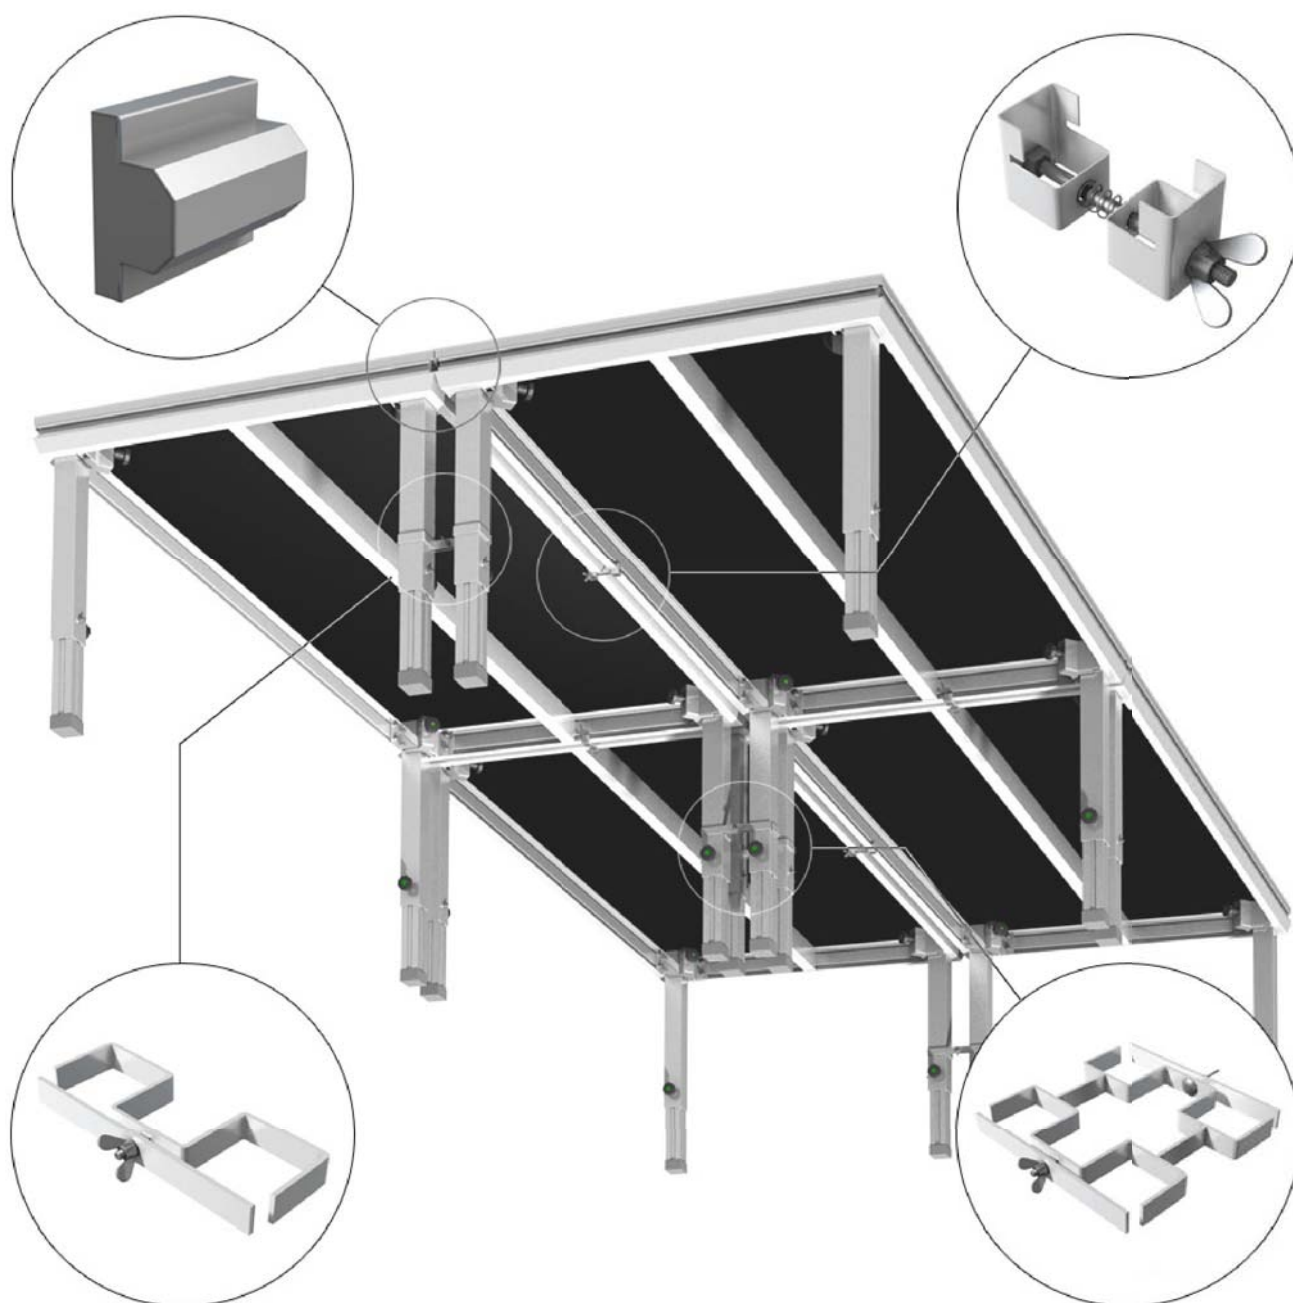

We have designed our stage deck series in order to minimize the quantity of accessories which are needed to build the stage. You need only 4 loose connection accessories to build a whole stage system. It makes your assembly much easier and saves your time.

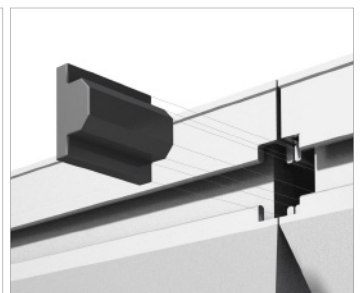

Deck 2 Deck clamp
Connection clamp to
connect two adjacent
stage decks.

Recommended quantities
– 2 pcs for 2m connection
side and 1 pcs for 1m side.

Leg 2 Leg clamp
Steel clamp for connection
between 2 adjacent stage
legs

4 leg clamp
Steel clamp for connection
between 4 adjacent legs

Leveling insert
Leveling insert to keep
adjacent decks on the
same level on an uneven
ground



TRANSPORT TROLLEYS



VTT – deck trolley
Transport trolley enables to carry up to 15 pcs
of 2x1m VERSA 750 decks



VDT – door transport trolley
Transport trolley for up to 6 pcs of VERSA 750
decks in vertical position

